




Vonix Limited
www.vonix.co.uk

Dial-a-Flow Regulators

For Gas Cylinders

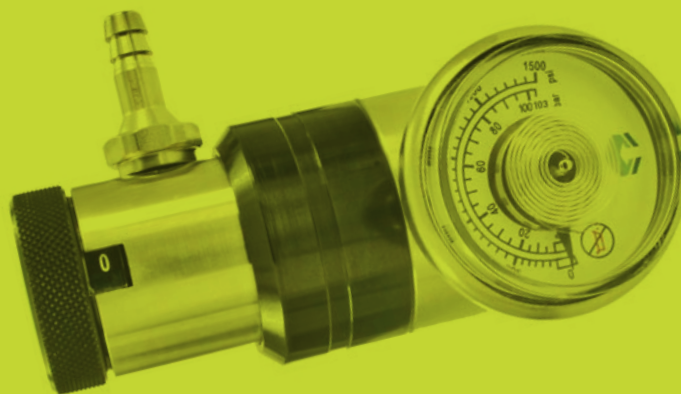


PRODUCT CODE SERIES 2000

vonix



DIAL-A-FLOW REGULATOR C10 BRASS NP

Product Code: 2001

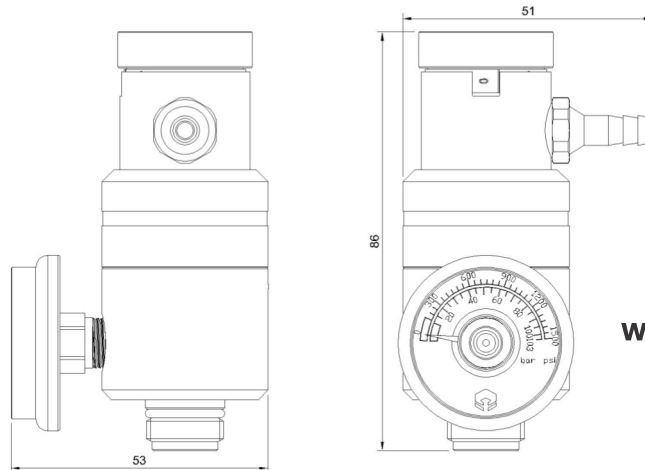

Warranty:- All regulators are warranted for 12 months.

The Dial-A-Flow regulator uses a single stage design which give the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases and handheld gas detectors

Materials of construction

| | |
|-----------------|-------------------------|
| Body | Stainless Steel |
| Neck | Aluminum Black anodized |
| Piston | Brass |
| Seats and Seals | Teflon, Viton & Buna-N |
| Bonnet | Aluminum Black Anodized |

Flow rate options


1. 0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn
2. 0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn
3. 0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn

| Model | Maximum Inlet Pressure | For Reactive gases and/or non-reactive gases | Flow rates | Inlet Connection | Outlet Connection | Gauge | Weight Kg |
|-------|---------------------------|--|--------------------------|------------------|------------------------|------------------------------------|-----------|
| 2001 | 0 to 1200 psig/ 83 bar | Brass NP- for Non- Reactive Gases | Refer flow rate table | 5/8"x18UN C10 | 3/16" Barb 4.8mm | Brass 0 to 1500 psig 103 bar | 0.350 Kg |

Vonix


Vonix Limited

E: info@vonix.co.uk
W: www.vonix.co.uk

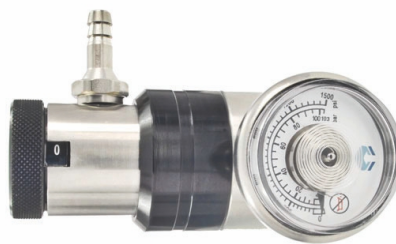

DIAL-A-FLOW REGULATOR C10 STAINLESS STEEL

Product Code: 2002

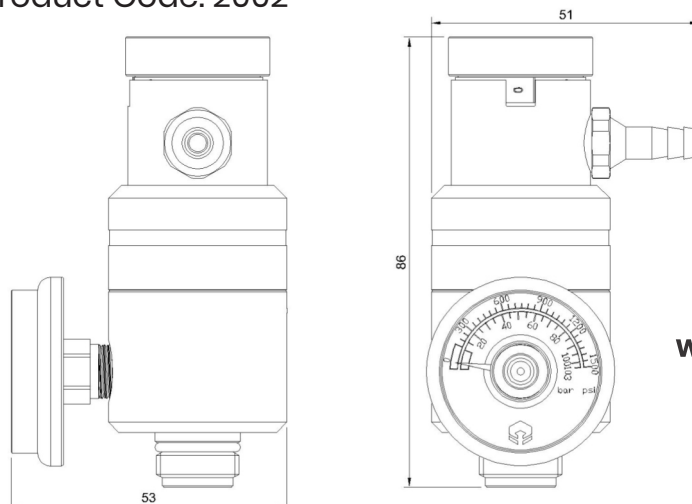

Warranty:- All regulators are warranted for 12 months.

The Dial-A-Flow regulator uses a single stage design which give the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases and handheld gas detectors

Materials of construction

| | |
|-----------------|-------------------------|
| Body | Stainless Steel |
| Neck | Stainless Steel |
| Piston | Stainless Steel |
| Seats and Seals | Teflon, Viton & Buna-N |
| Bonnet | Aluminum Black Anodized |

Flow rate options

- 0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn
- 0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn
- 0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn

| Model | Maximum Inlet Pressure | For Reactive gases and/or non-reactive gases | Flow rates | Inlet Connection | Outlet Connection | Gauge | Weight Kg |
|-------|---------------------------|--|-----------------------|------------------|---------------------|---|-----------|
| 2002 | 0 to 1200 psig/ 83 bar | Stainless Steel for Reactive Gases | Refer flow rate table | 5/8"x18UN C10 | 3/16" Barb 4.8mm | Stainless Steel 0 to 1500 psig 103 bar | 0.380 Kg |

vonix


Vonix Limited

E: info@vonix.co.uk
W: www.vonix.co.uk



DIAL-A-FLOW REGULATOR BRASS NP

Product Code: 2003

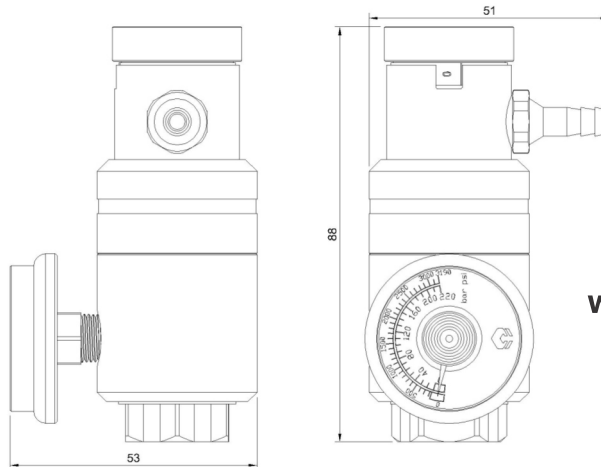

Warranty:- All regulators are warranted for 12 months.

The Dial-A-Flow regulator uses a single stage design which give the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases and handheld gas detectors.

Materials of construction

| | |
|-----------------|-------------------------|
| Body | Stainless Steel |
| Neck | Aluminum Black anodized |
| Piston | Brass |
| Seats and Seals | Teflon, Viton & Buna-N |
| Bonnet | Aluminum Black Anodized |

Flow rate options

| | |
|----|--|
| 1. | 0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn |
| 2. | 0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn |
| 3. | 0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn |

| Model | Maximum Inlet Pressure | For Reactive gases and/or non-reactive gases | Flow rates | Inlet Connection | Outlet Connection | Gauge | Weight Kg |
|-------|----------------------------|--|--------------------------|------------------|------------------------|---------------------------------------|-----------|
| 2003 | 0 to 3000 psig/ 207 bar | Brass NP - For Non- Reactive Gases | Refer flow rate table | ¼" NPT Female | 3/16" Barb 4.8mm | Brass 0 to 3190 psig 220 bar | 0.400 Kg |

Vonix


Vonix Limited

E: info@vonix.co.uk
W: www.vonix.co.uk



HP DIAL-A-FLOW REGULATOR STAINLESS STEEL

Product Code: 2004

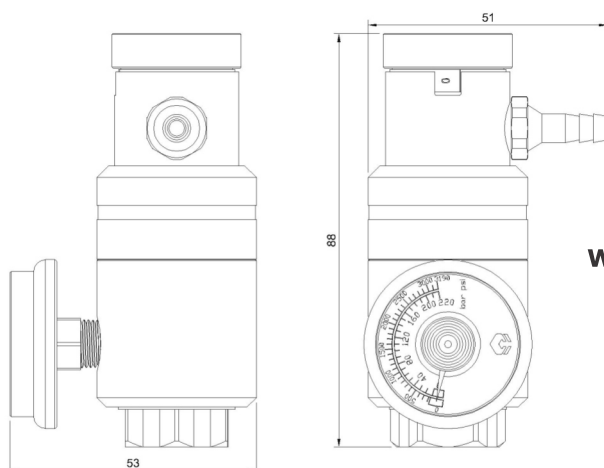

Warranty:- All regulators are warranted for 12 months.

The Dial-A-Flow regulator uses a single stage design which give the end user a series of preset constant flow rates. The Dial on the top of the regulator is to be used to manually change the flow rates. Used for calibration gases and handheld gas detectors

Materials of construction

| | |
|-----------------|-------------------------|
| Body | Stainless Steel |
| Neck | Stainless Steel |
| Piston | Stainless Steel |
| Seats and Seals | Teflon, Viton & Buna-N |
| Bonnet | Aluminum Black Anodized |

Flow rate options

| | |
|----|--|
| 1. | 0-0.3-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-8.0 L/Mn |
| 2. | 0-0.15-0.3-0.5-0.75-1.0-1.25-1.5-1.75-2.0-2.5-3.0 L/Mn |
| 3. | 0-0.5-1.0-1.5-2.0-2.5-3.0-5.0-6.0-7.0-10.0-15.0 L/Mn |

| Model | Maximum Inlet Pressure | For Reactive gases and/or non-reactive gases | Flow rates | Inlet Connection | Outlet Connection | Gauge | Weight Kg |
|-------|----------------------------|--|-----------------------|------------------|---------------------|---|-----------|
| 2004 | 0 to 3000 psig/ 207 bar | Stainless Steel For Reactive Gases | Refer flow rate table | 1/4" NPT Female | 3/16" Barb 4.8mm | Stainless Steel 0 to 3190 psig 220 bar | 0.430 Kg |

VONIX

Vonix Limited

E: info@vonix.co.uk
W: www.vonix.co.uk



Vonix Limited
info@vonix.co.uk

www.vonix.co.uk